

5. Enter PIN

Once you have completed the setup process you will see the following screen:



- Enter your pre-set SIM PIN followed by **Enter**

Please note:

If you enter the wrong PIN three times, the SIM card will be blocked automatically. You will not be able to make or receive calls until it has been unblocked. To unblock your SIM card contact your service provider.

■ ■ Irish customers should enter the PUK code supplied with your SIM card or call Customer Services on 1909.

6. ActiveSync setup on your PC

- Your PC needs to have Microsoft® ActiveSync® 3.7.1 installed before you can connect your Xda IIs to your PC
- Insert the CD provided into your PC and follow the on-screen instructions



- After installation of the software, insert your Xda IIs into its cradle, which should be connected to your PC
- Follow the on-screen instructions to complete the process, and choose your preferences for synchronisation



Contents

Experience the Xda IIs	3
Your Xda IIs	4
Your Xda IIs box contains	4
Your Xda IIs – a tour	6
Top components	6
Front components	7
Side components	8
Back panel components	9
Bottom edge components	10
Navigation bar	11
Baseline navigation bar	12
O₂ Active menu	14
Help and trouble shooting	17
Help online	17
Talk to us	17
Frequently asked questions	17
Xda IIs accessories	20
Index	21



Experience the Xda^{*} IIs^{*}

As one of the most powerful handhelds on the market, the Xda IIs gives you more control over the way you work and play.

Mobile phone

Use your Xda IIs like a normal mobile phone to always keep in contact. Make calls, send text messages, send email or media messages at home or abroad.

Video and pictures

With a built-in camera and an enhanced colour screen you can create and send unique messages by shooting pictures, and video with sound.

Internet and messaging

With Pocket Outlook you can send and receive emails with attachments as well as keeping track of meetings and events by using the personal organiser and synching with your desktop.

You can simply compose and send media messages as well as texting and emailing your contacts wherever you are.

Using Pocket Internet Explorer you can have fast and reliable full colour Internet access on the move with no wires or add-ons.

* Subject to network coverage.

Visit www.o2.co.uk/xda to find out how to get the most out of your Xda IIs – 3

Your Xda IIs

Your Xda IIs box contains



Xda IIs – your phone and handheld PC in one



Cradle – for charging your Xda IIs and battery, and physically connecting to your PC



Xda IIs battery – to power your Xda IIs



Xda IIs case and belt clip – to protect and carry your Xda IIs



Stylus – to operate your Xda IIs' touch sensitive screen



Warranty card

Your Xda IIs



Microsoft® Pocket PC Companion CD including ActiveSync for linking your Xda IIs and PC



Microsoft® Windows Mobile™ 2003 user manual



AC power adaptor – to connect your Xda IIs cradle to a power source



22 PIN DC power connector – allows you to connect your AC adaptor to the Xda IIs without your cradle



Hands-free stereo headset



Xda IIs quick start guide (this booklet)

Please note:

O₂ may provide additional items with your Xda IIs as they become available.

Images are shown for illustration purposes only and actual box contents may differ in appearance.

Your Xda IIs – a tour



Top components

1 Bluetooth®/WLAN

Will flash blue slowly when Bluetooth is switched on, and quickly when being actively used. Will flash green when WLAN is on. Green and blue alternate when both Bluetooth and WLAN are on.

2 Earphone jack

Allows you to use the hands-free kit supplied with your Xda IIs.

3 SD/MMC card slot

Insert either MMC or SD cards in this slot. This slot supports SDIO. Please refer to your Microsoft® Windows Mobile 2003 manual for further information.

4 Power button

Press and hold to turn the backlight on and off. Press to turn the screen off – if the GSM phone is switched on, Xda IIs will remain connected and able to receive calls and text messages.

5 Stylus slot and stylus

A neatly hidden slot for housing the stylus.

6 Power/Charge light

Amber when charging, green when fully charged, green flashing when phone is on.



Front components

1 Speaker

2 Calendar button

Press for quick access to your calendar.

3 Navigation bar

Displays the active program, signal strength and time. Also see page 11.

4 Today

Takes you back to the today page.

5 Inbox

Takes you to Pocket Inbox.

6 Internet

Connects you to the Internet.

7 OK

Selects OK or closes the application you are in.

8 Cancel call key

Press to end a call, or press and hold to end a GPRS data connection.

9 Navigational pad

To scroll through drop down menus or programme instructions.

10 Call key

Press to take a call or to go to the phone key pad. Press and hold to activate/de-activate the speakerphone during a call.

11 Touch screen display

For handwriting, drawing or to make a selection with the stylus.

12 O₂ Active menu

Takes you directly to all the commonly used mobile applications.

13 Start menu

Tap here to open the Start menu.

14 O₂ icon


Tap here to return to the main O₂ menu.

15 Contacts button

Press for quick access to your contacts.

Please note:

You can choose how you want to use the O₂ key on the slide out keyboard. See the Microsoft® Windows Mobile Manual for more details.

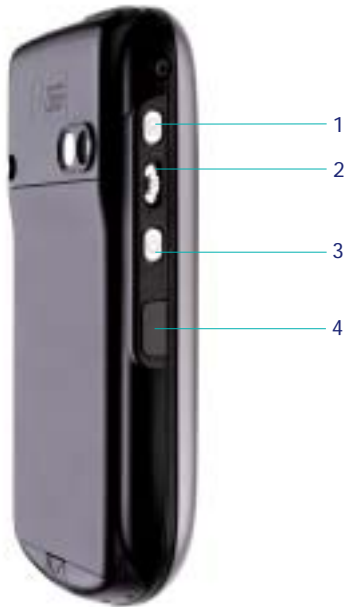

Side components

1 Record button

Press for quick access to the record function which allows you to make sound recordings. Hold to start recording and release to stop recording.

2 Volume control

Push up or down to change the volume.

3 Camera button

Press to go directly to the camera.

4 Infrared port

Enables you to exchange file(s) or data with other devices without cables/wires.



Back panel components

1 Mirror

Use when taking pictures of yourself.

2 Camera

Allows you to take pictures and video clips.

3 Battery

The battery is removable, and the SIM is found underneath it.

4 Battery lock button

Slide to lock/unlock battery

5 Aerial connector

External connector.



Bottom edge components

1 Microphone

Speak here when making a call or voice recording.

2 Reset

Press into the hole with the end of your stylus to soft reset your device. This is the same as shutting down and restarting your PC.

3 Sync/Charge connector


This connector is used when synchronising/transmitting data or recharging.

Your Xda IIs – a tour












Navigation bar

The navigation bar, located at the top of the screen, displays the name of the active program and current time. Below are some of the icons you may see.

Please note:

If there is not enough room to display all the icons that are needed, the notification icon, , can be seen in the navigation bar. Tap to view all icons.







Status icon	Meaning
	Tap here to go back to the O ₂ Active menu This icon turns blue when the device has a data connection open
	Displays the name of the current active Program e.g. Active
	Tap here to control the PDA and phone volume
	Battery low
	Battery very low
	Data connection is active
	Synchronisation is occurring
	Notification that one or more instant messages were received
	Notification that one or more email/SMS messages were received
	Indicates the phone is on and the signal strength is strong
	Indicates the phone is on and the signal strength is weak
	The phone is searching for a network
	Indicates the phone connection is switched off

Baseline navigation bar

The baseline navigation bar, located at the bottom of the screen, displays the following icons to help you navigate around your Xda IIs.



Status icon	Meaning
New	Tap here to open a new Word or Excel file, write a note, send an email or text
Help	Need Help on the O ₂ Active menu? Tap here
	Task Manager. Tap here to close applications running in the background – this can help your Xda IIs to run faster
	Turn the sound on or off
	Bluetooth. Tap here to turn Bluetooth on or off, or make your Xda IIs 'discoverable'
	Turns the Wireless LAN manager on and off



O₂ Active™ menu

This section takes a quick look at the contents of the O₂ Active menu on your Xda IIs.



Messaging

Take control and communicate! Take a picture and send it as a postcard to someone's home address. Set up your Xda IIs for Internet Email. Even record a short video clip and send it direct to someone's mobile phone*. Email, text, pictures and even sound clips - it's amazing what you can do.

Messaging links you to:


- Inbox
- Email Setup
- Text
- Multimedia
- Photocards
- Call Voicemail
- MSN Messenger

Phone

Tap once, and you're into the phone application to make a call. Tap out someone's number on the keypad, or use a number from your Contact list and then press the Green call key.

* Playback depends on phone model.

** Subject to network coverage.

 Online content in Ireland may vary.

Your Xda IIs



Internet

Surf the same full colour Internet you can at home. Or connect to our unique O₂ Active WAP service to discover news, games, sports and other short, to the point pieces of information. Just one tap and you are connected.

Internet links you to:

- Internet
- O₂ Active WAP



News

Single tap access directly to the latest news content via the Internet.



Tools

Customise how you use your Xda IIs. Use Profiles and Connections to choose flight mode, meeting mode or even silent mode. The Hotspot directory gives you the latest list of O₂ Wireless LAN hotspots, for when you're out and about**.

Tools links you to:

- O₂ Hotspot Directory
- Email Setup
- Task Manager
- Backup/Restore
- View
- Active Update
- Power Save
- Assign Buttons
- Profiles and Connections



Media Centre

Download short video clips from our unique O₂ Active mobile video service, covering sports, fashion, entertainment or even just the news. Listen to your music files when out and about, or even just update your ringtone**.

Media Centre links you to:

- Media Player
- Video downloads
- Album
- Games
- Ringtone downloads



Help and troubleshooting

Help online

If you need technical assistance with your Xda IIs send us an email to:

 o2datasupport@o2.com

 support@o2.ie

Responses will be provided within 24 hours.

Talk to us

You can call your Service Provider to answer your Xda IIs questions. Your Service Provider's number is printed on your monthly bill. It is likely for more technical Xda IIs queries you will be transferred to O₂'s specialist Xda IIs support service.

If you are a corporate customer we suggest that you contact your internal help desk for advice on your company's Xda IIs support process.

Frequently asked questions

How can I prevent my Xda IIs buttons being pressed while the device is in my bag?

Xda IIs supports a feature called Key Lock, which will disable all button presses except for the power button. To enable **Button Lock**, select **Start > Settings > System > Button Lock**, then select **Lock all buttons except Power button**. This will disable all button presses when the device screen is off. When you press the power button (or receive an incoming call), all buttons will work again.

Can I receive phone calls while downloading content on the Xda IIs?

When using Wireless LAN you will be able to make and receive phone calls. You will not be able to make or receive phone calls while actively downloading web pages or email from the Internet via GPRS. Your incoming call will be forwarded as per your phone settings (under services). While the connection is idle (i.e. no data is being transferred), you can make and receive phone calls.

How can I use conference facilities with my Xda IIs?

Using O₂ Group Conferencing, you can have a conversation with up to 19 other people. Call **2244** from your Xda IIs and select **Option 4** to speak to an operator, who will set up the facility for you, and visit www.o2.co.uk/conferencing for more details. For information on Group Conferencing in Ireland, please visit www.o2.ie/business

What are the supported maximum speeds of GPRS?

Xda IIs supports up to maximum download speeds of 53 Kbps, and maximum upload speeds to 26 Kbps.

How do I turn off the phone and go into PDA mode?

Tap the antenna icon next to the speaker symbol at the top of the screen and select **Turn on flight mode**.

When I'm abroad, I see a black triangle sign at the top of the screen.

The black triangle means that you are roaming on a foreign network (such as SFR in France and Omnitel in Italy).

How can I set up a shortcut in my Xda IIs main menu?

From the main menu select **Tools > My Shortcuts > Add New >**. From here browse to an exe file and double tap it to create the shortcut (single tap won't work).

Is there a way to close applications using one of the hardware buttons on Xda IIs?

Select **OK**, the button on the front to the right.

How can I display my own number on my Xda IIs?

Go to **Start > Programs > SIM Manager > Tools > List of Own Numbers**. Tap number **1** in the list. Enter your name and mobile number in the fields provided. Click **Change**. Click **OK** to exit. Now do a soft reset. Now when you go into **Phone > Tools > Options**, you will see your mobile number.

Can I set up my POP3 email so it automatically checks and downloads at set intervals?

Yes. Once your email account is set up on the Xda IIs then follow this process to set up automatic checks for new emails. From the main menu select **Messaging > Inbox Tap Tools > Options > Accounts >** tap on your email account. Tap **Next** three times. Tap **Options**. Tick **Connect** and check for messages ever. In the box below this you can set the interval time you want to auto check your mail - or leave it set to the default of 15 mins. Tap **Next** twice and then **Finish**.

How do I delete POP3 email from the server?

By default, Pocket PC devices will only pull a COPY of the emails from the POP3 server. To be able to delete them from the server, you need to change a setting. Go to **Inbox > Tools > Options > Message**. From the **Empty Deleted Items** drop-down box, choose **Immediately**.

Help and trouble shooting

Now when you delete emails on the Xda IIs (so they are in **Deleted Items**), and then **Send/Receive** again, the emails should delete from the email server. Note, this feature may not be supported by your Internet Service Provider.

How do I use the audio recording feature on my Xda IIs?

There are two ways of recording on the Xda IIs. One will record in .pwi format which cannot be played in Windows Media Player. The other will record in .wav format which will play in Windows Media Player. Here is the method of recording in each:

To record in .pwi format - tap **Start** > **Programs** > **Notes** (or **Phone** > **Notes** button). Now tap the tape symbol and then the red dot to start recording in .pwi format.

To record in a .wav format - tap **Start** > **Programs** > **Notes**. Or tap **Phone** > **Notes** button > **OK** (you should now see the All folders bar at the top). Tap the tape symbol and then the red dot to start recording in .wav format.

Is it possible to create long audio recordings?

Yes - you can save the recording onto an inserted SD memory card. This way you can record until the card is full. With a 128 MB SD card you can record approximately 90 minutes of voice conversation. Adjust the storage location for the recordings under **Start** > **Notes** > **Tools** > **Options** > **Save to** with the entry: **Storage card** (if available).

Xda IIs accessories

Add accessories to your Xda IIs to get even more from your device.

Visit www.o2.co.uk/xda for more information. Or take a look at the range of accessories direct from your Xda IIs via the O₂ Active Internet home page.

Index

Accessories	20
Battery	Inside cover, 4, 9, 11
Box contents	4
Calendar	7
Camera	9
Charging	Inside cover
Configuration	Inside cover
Contacts	7
Excel	12
FAQs	17
Headset	5, 6
Help	17
Infrared	8
Microphone	10
O ₂ Active	14
Phone	7
PIN	Inside cover
Reset	10
Screen	7
Screen icons	7, 11, 12
SD/MMC card slot	6
SIM card	Inside cover, 9
SMS	11
Soft reset	10
Sound Control	8
Stylus	4
Troubleshooting	17
Volume Control	8
WLAN	6
Word	12
Xda IIs buttons	6, 7, 8

